


8" EASY DRILL™ "M" 7-8 5.9



| Specifications | | |
|---------------------------|-----------------|------------|
| | Imperial | Metric |
| Motor OD | 8" | 203 mm |
| A = Overall Length | 37' | 11.3 m |
| B = Length to Bend | 70.25" | 1.78 m |
| C = Length to Stab Center | 24" | .61 m |
| Weight | 4340 lbs | 1545 kg |
| Bit Size Range | 9 1/2"-17 1/2" | 241-311 mm |
| Top Sub Connection | 6 5/8 REG, NC56 | |
| Bit Box Connection | 6 5/8 REG | |
| Adjustable Angle Range | 0-3 | |

| Performance Data | | |
|--------------------|---------------|---------------|
| | Imperial | Metric |
| Flow Range | 300-900 gpm | 1136-3407 lpm |
| Rev per | .160 rev/gal | .04 rev/litre |
| Speed Range | 48-144 rpm | |
| Max Diff Pressure | 1390 psi | 9600 kPa |
| Max Torque | 21,870 ft-lbs | 29,700 Nm |
| Max Recommended | 592 HP | 442 kW |
| Max WOB | 300,000 lbs | 133,000 daN |
| Max Allowable Pull | 300,000 lbs | 133,000 daN |
| Max Pull to Yield | 600,000 lbs | 266,000 daN |

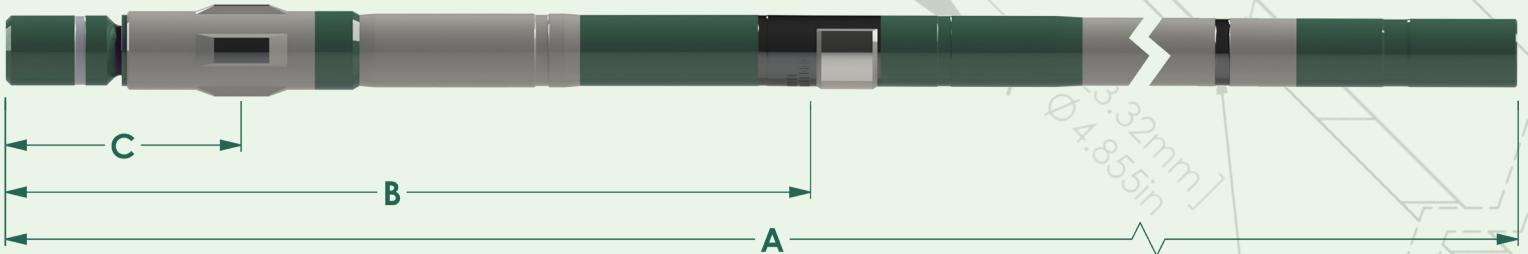